

Speaker System: PDP-S07-LR (Can be used only with the PDP-433CMX/PDP-433MXE)

Specifications

- External dimensions** 74 (W) × 630 (H) × 101 (D) mm
 (2-29/32 (W) × 24-13/16 (H) × 3-31/32 (D) in.)
 1220 (W) × 630 (H) × 101 (D) mm (48-1/32 (W) × 24-13/16 (H) × 4-1/16 (D) in.)
 (plasma display monitor when using PDP-433CMX or PDP-433MXE)
- Weight** 1.6 kg (3.5 lbs.)
 34.7 kg (76.5 lbs.) (plasma display monitor when using PDP-433CMX or PDP-433MXE)
- Dimensions of packaging** 694 (W) × 168 (H) × 318 (D) mm
 (27-5/16 (W) × 6-5/8 (H) × 12-17/32 (D) in.)
- Package weight** 4.6 kg (10.1 lbs.)
- Cabinet** Enclosed type, antimagnetic design
- Used speakers (two-way method):**
 - Woofers (for low tones)** Oval cone type
 - Tweeters (for high tones)** 2.5 cm dome type
- Nominal impedance** 8 Ω
- Frequency Range** 60 to 20,000 Hz
- Sensitivity** 82 dB/W (at 1 m distance)
- Permissible input:**
 - Max. input** 12 W
 - Rated input** 4 W
- Crossover frequency** 3 kHz

Accessory parts (for 2 speakers)

- Speaker cable × 2
- Flat countersunk head screw × 4
- Hexagon socket head screw × 4
- Mounting tool × 1
- Washer M8 (ø25) × 2
- Speaker mounting fittings (bottom) x2
- Speaker mounting fittings (top right) x1
- Speaker mounting fittings (top left) x1
- Mounting plate (for left side) x 1
- Mounting plate (for right side) x 1
- Warranty card x 1
- Operating Instructions x 1


Note
 After this unit has been installed on the plasma display, you can't use the display operation panel.

 **Cautions**

The color may be irregular if there is a CRT type PC monitor close to it. To prevent this, keep the speaker separated from a PC monitor.

External Dimensions (plasma display monitor when using PDP-433CMX or PDP-433MXE)

⊙ Center of gravity
(Units: mm)

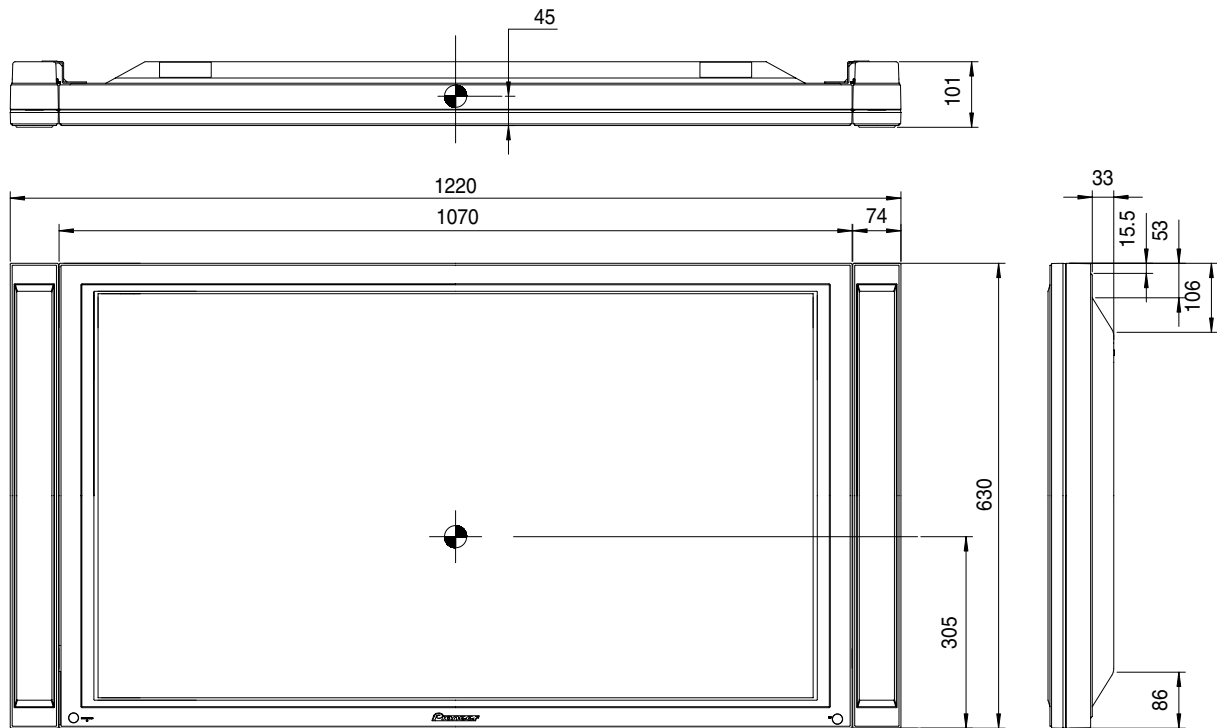

These are the dimensions of the side surface of the speaker.